Transmit Diversity applied on the CDMA/TDD Cellular Systems

Katsuhiko HIRAMATSU, Kazuyuki MIYA, Osamu KATO, Koichi HOMMA

Telecom Research Laboratory, Matsushita Communication Ind. Co., LTD.
5-3 Hikarinooka, Yokosuka, Kanagawa, Japan, Tel:+81-468-40-5422, Fax:+81-468-40-5183
Katsuhiko.Hiramatsu@yrp.mci.mei.co.jp

Abstract   This paper shows that the result of cell search and Open Loop Transmit Divesty of CDMA TDD. The TSTD type transmit diversity for PSCH can shorten the cell search time of UE at low Doppler frequency. The Block STTD type transmit diversity for P-CCPCH can improve the BER performance around 3dB compared with a single antenna transmission. Furthermore the authors propose open loop type sector/cell selection handover. The improvement by using this scheme, as compared to hard handover, is almost 2 dB for between sectors and 1.1dB to 1.6dB for between cells, depending on Doppler frequency. The change for the switching rate into 10ms makes the gain of 0.8dB at $f_D=53Hz$ and 1.7dB at $f_D=222Hz$, respectively.

I. Introduction

The CDMA(Code Division Multiple Access) is a key multiple access technologies proposed for IMT-2000 being standardized in ITU-R. CDMA based system is categorized as follows[1]: CDMA DS(Direct Sequence) and CDMA MC(Multi Carrier), which access method is FDD (Frequency Division Duplex), and CDMA TDD(Time Division Duplex)[1]. CDMA TDD is based on TD-CDMA (Time Division-Code Division Multiple Access)[2,3] system and W-CDMA/TDD (Wideband-Code Division Multiple Access)[2,4], which introduces beneficial schemes using channel reciprocity of TDD[5,6]. Narrow band (1.28Mcps) of TDD is based on TD-SCDMA[2,7]. The authors have proposed CDMA TDD cellular system[8,9] and proved transmit diversity on Base station (BS) and open loop transmit power control (OL-TPC) on User Equipment (UE) through field trials.

In this paper, we propose three techniques using channel reciprocity of TDD.
(1) Transmit diversity for Synchronization Channel
    BS transmits a Physical Synchronization Channel from 2 antennas alternatively. Initial synchronization acquisition time on the UEs is shortened due to both time and space diversity.
(2) Transmit diversity for Common Control Channel to enhance OL-TPC reference
    BS transmits a Primary Common Control Channel (P-CCPCH), that is a reference of OL-TPC on the UE, from both antennas using Block STTD (Space Time Transmit Diversity) encoding. OL-TPC accuracy is improved due to space diversity. Besides that, intra- and inter-cell interference from UE is also reduced.
(3) Open Loop Sector/Cell selective Handover
    On the CDMA TDD system, the slot must be switched to another for performing handover since the reuse is not 1. To reduce the power consumption on UE, we propose an open-loop sector/cell selective handover based on the receive power of the common control channel. When switching a cell to another, the size of the interleave is reduced from 20ms to 10ms to improve the switching rate.

II. Configuration of the CDMA TDD mode

A. System Description

Table 1 shows the main specification of CDMA TDD system. Figure 1 shows the frame format[10] for chip rate of 3.84Mcps. Frame format of low chip rate (1.28Mcps) is for further study at this moment. Figure 2 shows the transport channel to physical channel mapping[6].

Table 1 Main specifications of CDMA TDD mode system

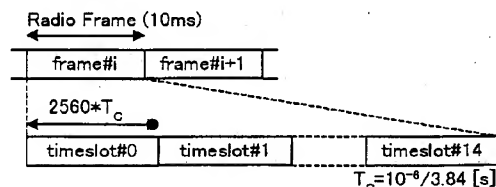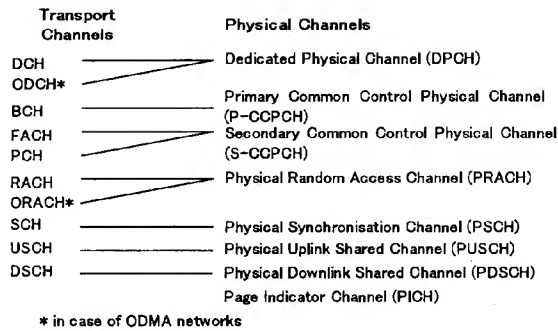| Items	Specification
Access Method	DS-CDMA TDD (with TDMA Component)
Frequency Band width	5 [MHz]
Chip Rate	3.84 [Mcps] / 1.28 [Mcps]
Frame Structure	See Figure 1
Data/Spreading Modulation	Data: QPSK , Spreading: $\pi/2$ shift BPSK
Scrambling	16 chip
Channelization Code	OVSF (1-16)
Training Sequence	Midamble (512/256 [chip])
Error Correction	Convolutional (K=9, R=1/2) or Turbo code
Power Control	Uplink: Open Loop + Outer Loop Downlink: Inner Loop + Outer Loop
Inter-BS synchronization	Synchronization
Transport Channel to Physical Channel mapping	See Figure 2

Figure 1 Frame Format for 3.84Mcps

Physical Channels

DCH ——————— Dedicated Physical Channel (DPCH)
ODCH*

BCH ——————— Primary Common Control Physical Channel
(P-CCPCH)
FACH ——————— Secondary Common Control Physical Channel
PCH (S-CCPCH)

RACH ——————— Physical Random Access Channel (PRACH)
ORACH*

SCH ——————— Physical Synchronisation Channel (PSCH)
USCH ——————— Physical Uplink Shared Channel (PUSCH)
DSCH ——————— Physical Downlink Shared Channel (PDSCH)
Page Indicator Channel (PICH)

* in case of ODMA networks

Figure 2 Transport channel to physical channel mapping

B. Cell Search and Synchronization Channel

The Synchronization Channel (Figure 3) is used for Cell
Search on UE. The SCH consists of two sub channels,
the Primary and Secondary SCH. The Primary SCH con-
sists of the Primary Synchronization Codes, a modulated
code of length 256 chips, which is transmitted in one or
two slots in every Radio Frame. The Secondary SCH
consists of a length 15 repeatedly transmitted Secondary
Synchronization Codes, which is a sequence of modulat-
ed codes of length 256 chips. This initial cell search is
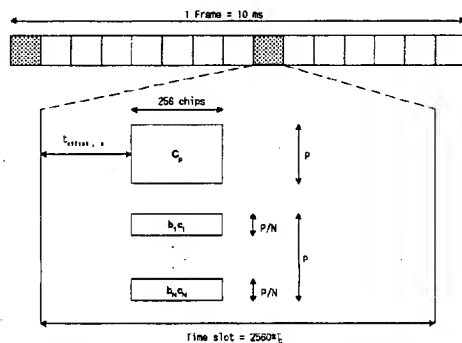carried out in three steps.

Figure 3 Scheme for Physical Synchronisation channel
(PSCH)

C. Transmit Diversity Schemes[11]

Transmit diversity schemes for the CDMA TDD system
are as follows.

(1) Physical Synchronization Channel (PSCH)

Time Switched Transmit Diversity (TSTD) is applied to
PSCH. Figure 4 shows the antenna switching pattern. P-
SCH and S-SCH are transmitted from antenna 1 and 2
alternatively.

(2) Primary-Common Control Channel (P-CCPCH)

Block Space Time Transmit Diversity (Block STTD)
may be employed as transmit diversity scheme for the P-
CCPCH. A block diagram of the Block STTD transmitter
is shown in Figure 5 Before Block STTD encoding, chan-
nel coding, rate matching, interleaving and bit-to-symbol

mapping are performed in the non-diversity mode. Block
STTD encoding is separately performed for each of the
two data fields present in a burst. For each data field at
the encoder input, 2 data fields are generated at its out-
put, corresponding to each of the diversity antennas.

(3) Dedicated Physical Channel (DPCH)

Selective Transmit Diversity (STD) and Transmit
Adaptive Antennas (TxAA) are examples for DPCH. The
transmitter structure is shown in Figure 6. The spread
complex valued signal is fed to both transmit antenna
branches, and weighted with antenna specific weight
factors w_1 and w_2. The weight factors are complex valued
signals (i.e., $w_i = a_i + jb_i$), in general. These weight factors
are calculated on a per slot and per user basis.

The weight vector of STD will take only two values de-
pending on the signal strength received by each antenna
in the uplink slot. For each user, the antenna receiving
the highest power will be selected.

The weight vector for TxAA to be applied at the trans-
mitter is the w that maximises:

$$P = w^H H^H H w \qquad (1)$$

where

$$H = [h_1 \ h_2 \ ...]$$

and where the column vector h_i represents the estimat-
ed uplink channel impulse response for the i'th transmis-
sion antenna, of length equal to the length of the channel
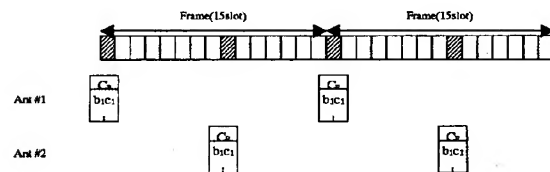impulse response.

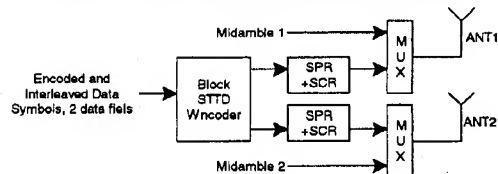Figure 4 Transmit Diversity applied to PSCH

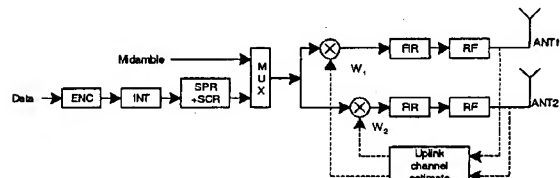Figure 5 Transmit Diversity applied to P-CCPCH

Figure 6 Transmit Diversity applied to DPCH

D. Transmit Power Control

Power control is applied for the TDD mode to limit the interference level within the system thus reducing the intercell interference level and to reduce the power consumption in the UE.

Table 2 Transmit Power Control characteristics

	Power control rate	Step size
Uplink	Variable 1-7 slots delay (2 slot SCH) 1-14 slots delay (1 slot SCH)	
Downlink	Variable, with rate depending on the slot allocation.	1, 2, 3 dB

(1) Uplink Control

For CPCH, the transmitter power of UE shall be calculated by the following equation:

$$P_{PRACH} = L_{P-CCPCH} + I_{BTS} + C \qquad (2)$$

where

P_{PRACH} Transmitter power level in dBm,

$L_{P-CCPCH}$ Measure representing path loss in dB (reference transmit power is broadcast on BCH),

I_{BTS} Interference signal power level at cell's receiver in dBm, which is broadcast on BCH,

C This constant value shall be set by higher Layer (operator matter).

For DPCH, after the synchronization between UTRAN and UE is established, the UE transits into open-loop transmitter power control. The transmitter power of UE shall be calculated by the following equation:

$$P_{UE} = \alpha L_{P-CCPCH} + (1-\alpha)L_0 + I_{BTS} + SIR_{TARGET} + C \quad (3)$$

where

P_{UE} Transmitter power level in dBm,

$L_{P-CCPCH}$ Measure representing path loss in dB (reference transmit power is broadcast on BCH).

L_0 Long term average of path loss in dB

I_{BTS} Interference signal power level at cell's receiver in dBm, which is broadcast on BCH

α α is a weighting parameter which represents the quality of path loss measurements. α may be a function of the time delay between the uplink time slot and the most recent down link time slot containing a physical channel that provides the beacon function.

SIR_{TARGET} Target SNR in dB. A higher layer outer loop adjusts the target SIR.

C This constant value shall be set by higher Layer (operator matter).

If the midamble is used in the evaluation of $L_{P-CCPCH}$ and L_0, and the Tx diversity scheme used for the P-CCPCH involves the transmission of different midambles from the diversity antennas, the received power of the different midambles from the different antennas shall be combined prior to evaluation of these variables.

(2) Downlink Control

The Primary CCPCH transmit power can be changed based on network determination on a slow basis. The reference transmit power of P-CCPCH is signaled on the BCH on a periodic basis.

For Dedicated Physical Channel, the initial transmission power of the downlink Dedicated Physical Channel is set by the network. After the initial transmission, the UTRAN transits into SIR-based inner loop TPC.

III. Evaluation results

A. Cell Search with Transmit Diversity

The simulation assumed the 19 hexagonal cell layout shown in Figure 7. A cell site is located at center of each cell. We generated a random location of the test UE at a cell edge. This simulation condition was tight because of the weaker desired signal power and larger other-cell interference.

The simulation results on the first step of cell search are shown in Figure 8 (parameter is E_b/N_0) and Figure 9 (parameter is C/PG). We can clearly understand that the introduction of TSTD scheme for PSCH can significantly shorten the search time more than fixed antenna scheme at low maximum Doppler frequency f_D because of transmit diversity gain.
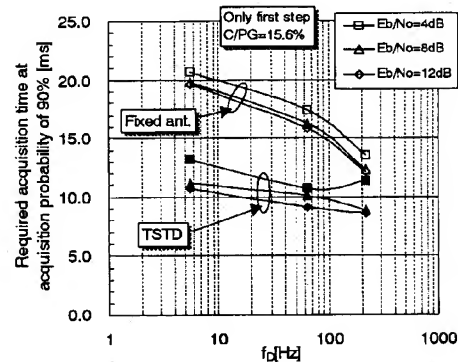

Figure 7 Cell layout (cell radius = 2km)

Figure 8 Simulation results of first step on cell search (Parameter: Eb/N0)
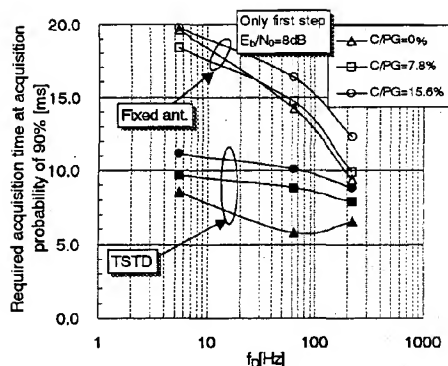
VTC2000

Figure 9 Simulation results of first step on cell search
(Parameter: C/PG)

B. Uplink Transmit Power Control with Transmit Diversity

To measure path loss, the UE receives a Midamble of P-CCPCH, which is transmitted from 2 antennas on BS alternatively, and combines them. Then the UE estimates both long term and short term path loss using reference transmit power that is broadcast on BCH. After that, the UE calculates transmit power using equation (3). Table 3 shows the simulation parameters. From Figure 10, OL-TPC gain using P-CCPCH with Block STTD (diversity scheme) on single antenna at BER of 10^{-3} is 3dB under one user environment. Figure 11 shows a BER performance of OL-TPC using Joint Detection[12] under 4 users environment. OL-TPC gain of measuring path loss using parallel transmitted Midamble to single antenna at BER of 10^{-3} is 3dB.

Table 3 Simulation Parameters

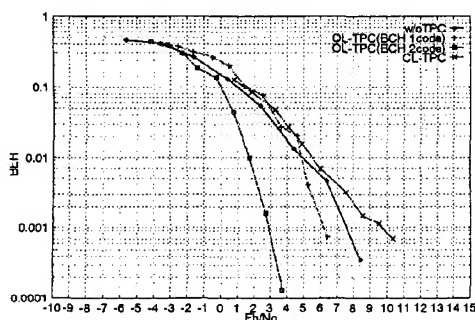| Items	Parameters
Dopplar Frequency	52.8Hz
Path model	equal level 2 path (1chip delay)
FEC	Convolutional Code (K=9,R=1/2)

Figure 10 Uplink BER performance
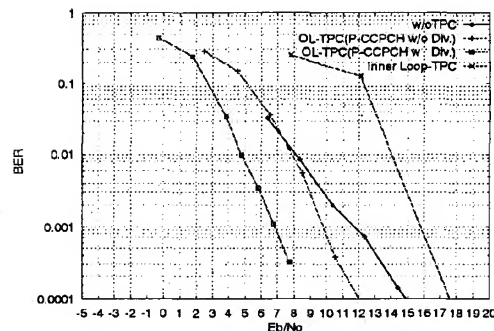(1 User using RAKE receiver)

Figure 11 Uplink BER performance
(4 user using Joint Detection[12])

IV. Additional Proposals

A. Open Loop Sector/Cell Selection Diversity

On the CDMA TDD system, the slot must be switched to another for performing handover since the reuse is not 1. It is necessary to use two slots to realize diversity handover, which increases the power consumption of UE. Therefore, it is intended to secure performance and reduce power consumption by receiving signals through the common control channel for two or more base stations on the UE side during handover, and by selecting the best destination of transmission. The transmission power is controlled for the selected destination of transmission. For Maximum Ratio Combining can be employ as diversity scheme on handover between sectors, selection is performed in steps of 10ms. Since the voice service of the CDMA TDD implements 20ms interleave, selection is performed in steps of 20ms for handover between cells. We therefore propose that 10ms interleave be employed during handover between cells. Table 4 shows the handover scheme.

Table 4 Handover scheme

Scheme		Handover between sectors	Handover between cells
1	UE transmission	Hard handover	Hard handover
	BS receiving	Hard handover	Hard handover
2	UE transmission	Selects the sectoe in steps of 10ms 20ms interleave	Selects the sector in steps of 20ms 20ms interleave
	BS receiving	Maximum-ratio combining	Selective
3	UE transmission		Selects the sector in steps of 10ms 10ms interleave
	BS receiving		Selective
4	UE transmission	Transmits to both the slots 20ms Interleave	Transmits to both the slots 20ms Interleave
	BS receiving	Maximum-ratio combining	After performing the maximum-ratio combining in the cell, performs selection between the cells

(1) Handover between sectors

The simulation result is given in Figure 12 and Figure 13. When using Time Slot (TS) #1,2 instead of hard handover (a), the required E_b/N_0 can be reduced by about 1dB through transmission by switching the two sectors (b). Compared with transmission to both the sectors (transmission power is increased by 3dB), the required E_b/N_0 for $f_D<53$Hz is reduced by about 1dB. At 222Hz where the effect of the open-loop selective diversity is lost, the difference is 3.5dB. This shows that the operation is favorable under the Doppler frequency environment at a speed lower than the medium speed. Almost the same result is obtained when using TS#5,6 in Figure 13.

(2) Handover between the cells

The simulation result is given in Figure 12 and Figure 13. When comparing handover between the cells (a, c, d, and f) with hard handover. The required E_b/N_0 can be reduced by about 1.1 to 1.6 dB through transmission by switching the two cells (a, d). Compared with sending to both the cells (transmission power is increase by 3dB), the required E_b/N_0 becomes -0.4 to -1.6 dB at $f_D<53$Hz and -6.0 dB at $f_D=222$Hz. This shows that the operation is favorable under the Doppler frequency environment at a speed lower than the medium speed. As for the case where the size of the interleave is changed to 10ms in order to obtain the switching rate of 10ms, the gain of required E_b/N_0 becomes 0.8dB at $f_D=53$Hz and 1.7dB at $f_D=222$Hz, respectively. This result shows that the change for the switching rate into 10ms is effective during handover between cells.
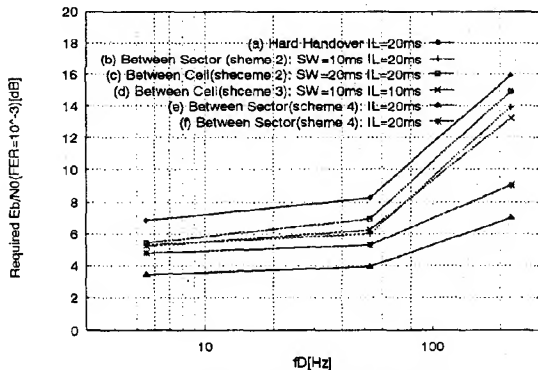
Figure 12 Uplink FER performance of Open Loop Sector/Cell Selective Handover (TS#1,2)
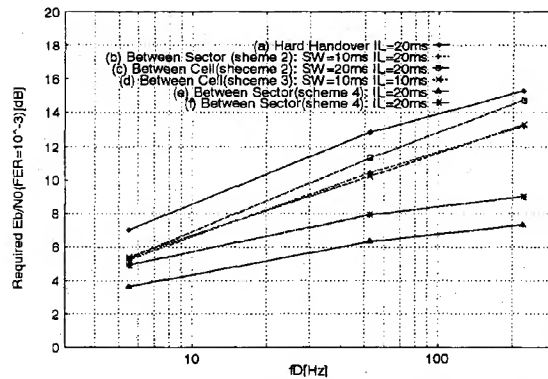(SW: Switching rate/ IL: Inter leaving size)

Figure 13 Uplink FER performance of Open Loop Sector/Cell Selective Handover (TS#5,6)

IV. Conclusions

In this paper, we proposed transmit diversity for PSCH and P-CCPCH. The TSTD type transmit diversity for PSCH can shorten the cell search time of UE at low Doppler frequency. The Block STTD type transmit diversity for P-CCPCH can improve a BER performance around 3dB compared with a single antenna transmission. Furthermore we proposed open loop type sector/cell selection handover. The improvement by using this scheme, as compared to hard handover, is almost 2 dB for between sectors and 1.1 dB to 1.6dB for between cells, depending on Doppler frequency. The change for the switching rate into 10ms makes the gain of 0.8dB at $f_D=53$Hz and 1.7dB at $f_D=222$Hz, respectively.

References

[1] www.3gpp.org
[2] http://www.itu.int/imt/2-radio-dev/proposals/index.html
[3] UMTS Terrestrial Radio Access
[4] Japan's Proposal for Candidate Radio Transmission Technology on IMT-2000:W-CDMA
[5] R.Esmailzadeh, M.Nakagawa, A.Kajiwara, "Power Control in Packets Switched Time Division Duplex Direct Sequence Spread Spectrum Communications," proc. VCT-'92, pp.989-992, 1992.
[6] R.Esmailzadeh, M.Nakagawa, A.Kajiwara, "Power Control in Packets Switched Time Division Duplex Direct Sequence Spread Spectrum Communications," proc. VCT-'92, pp.989-992, 1992.
[7] IMT-2000 Radio Transmission Technology (RTT) Proposals. 4. TD-SCDMA Radio Transmission Technology for IMT-2000
[8] M.Hayashi, K.Miya, O.Kato, K.Homma,"CDMA/TDD Cellular SysteUE Utilizing a Base-Station-Based Diversity Scheme",42th IEEE VTC, pp.799-803,1995
[9] M.Hayashi et al, "An Evaluation of Space Diversity Scheme for a CDMA/TDD System", Proc. of the 1996 IEICE General Conference, Mar., Japan, B-406, 1996.
[10] 3G TS 25 221 v3.1.0, "Physical Channels and mapping of transport channels onto physical channels (TDD)"
[11] 3G TS 25 224 v3.1.0, "Physical Layer Procedures (TDD)"
[12] Anja Klein, Kawas Kaleh, Paul Walter Baier, "Zero Forcing and Minimum Mean-Square-Error Equalization for Multiuser Detection in Code-Division Multiple-Access Channels", IEEE Trans. Vehicular Technology, VOL.45, No.2, pp.276-287, May 1996